



Stepper motor 23HS2409-01



The advantages :
High torque - High-precision - Smooth motion

Associated products :




- > **Power supply**
 - DR-120-24
 - DRP-240-24
 - DRP-480S-24
 - RS-100-24
 - RS-150-24
 - RS-75-24
 - SP-320-24
- > **Controller**
 - FIRST PAP 40/5
 - NANO PAP 40/3
 - NANO PAP 40/3 avec

moons'

81 Ncm

Coil		Bipolaire
Step angle	°	1.8
Step anglaur accuracy	%	5
Nominal current per phase	A	3
Resistance per phase	Ohm	0.85
Inductance per phase	mH	2.7
Holding torque	Ncm	81
Detent torque	Ncm	4
Rotor inertia	gcm ²	260
Number of wires		4

Insulation class	B
Bearings	Roulements à billes 625ZZ
Magnets	NdFeB
Minimum ambient operating temperature	-20 °C
Maximum ambient operating temperature	+50 °C
Weight	600 g
Protection	IP30

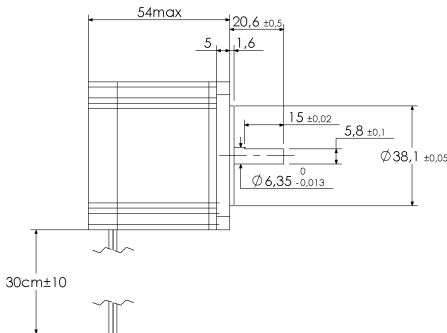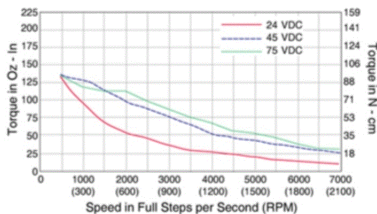

23HS2409-01